



鋼板巻ロングU SSグレーチングボルト固定型 (T-25) 500×500~1300

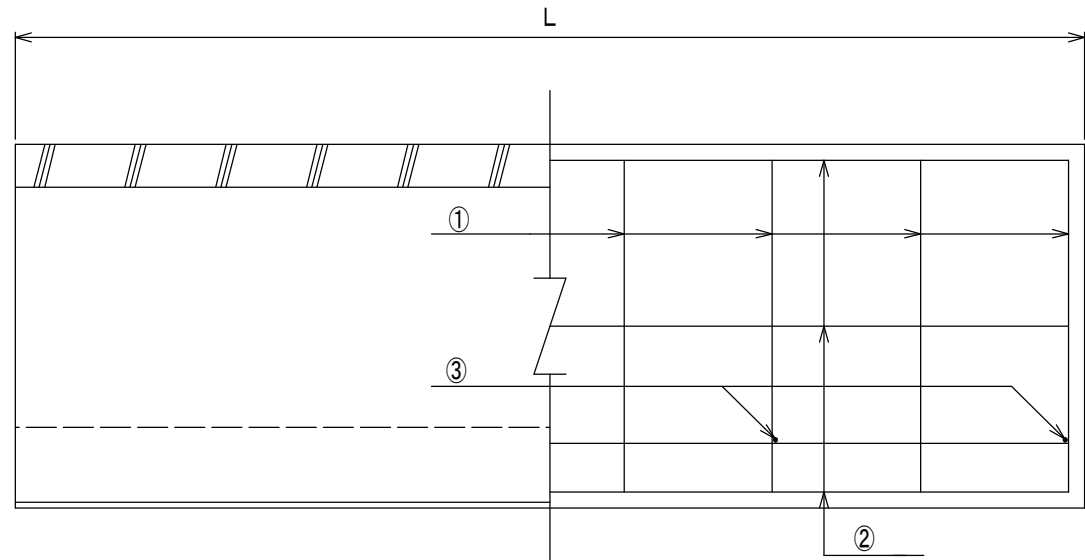

呼び名	寸 法 (mm)										配 筋 (径*本数)			重量 (Kg)
	A	a1	b	c	d	e	f	H	h1	L	①	②	③	
500×500	500	800	475	55	95	85	150	565	800	2000	φ5-10	φ5-12	D10-6	1543
500×600	500	800	470	55	95	85	150	665	900	2000	φ5-10	φ5-12	D10-6	1701
500×700	500	800	465	55	95	85	150	765	1000	2000	φ6-10	φ6-12	D10-6	1880
500×800	500	800	460	55	95	85	150	865	1100	2000	D10-8	φ6-14	D10-8	2045
500×900	500	800	455	55	95	85	150	965	1200	2000	D10-8	φ6-14	D10-8	2213
500×1000	500	800	440	55	95	85	150	1065	1300	2000	D10-10	φ6-14	D10-10	2383
500×1100	500	800	435	55	95	85	150	1165	1400	2000	D10-10	φ6-16	D10-10	2555
500×1200	500	800	430	55	95	85	150	1265	1500	2000	D10-12	φ6-16	D10-12	2730
500×1300	500	800	425	55	95	85	150	1365	1600	2000	D10-12	φ6-16	D10-12	2893
許容差 (mm以内)	±3	±6	±3	±3	±3	±3	±3	±3	±6	±6				

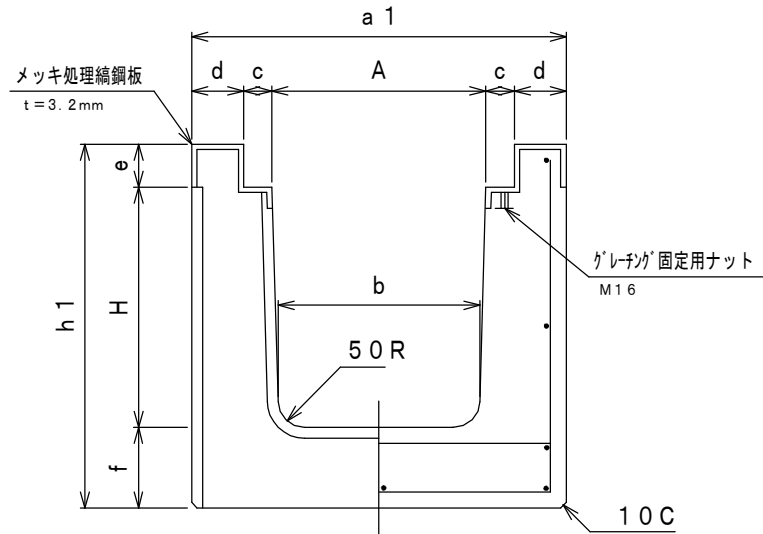