



# 鉄筋コンクリートL形切下部 JIS A 5372

切下, 斜

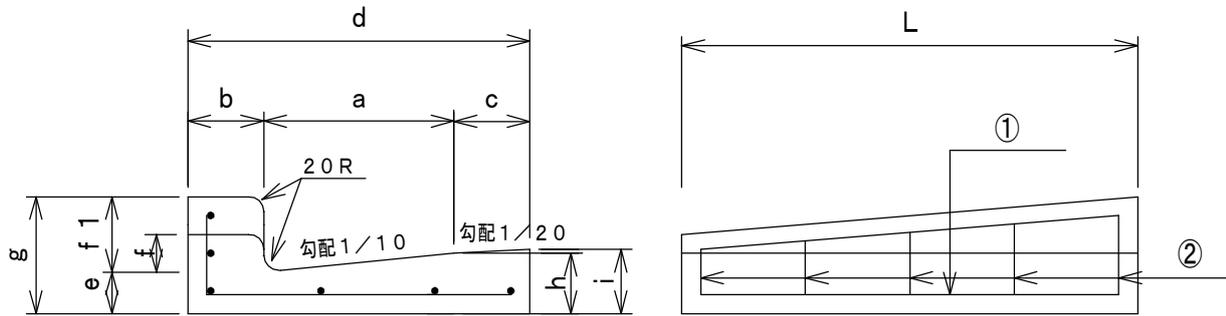

切下, 平

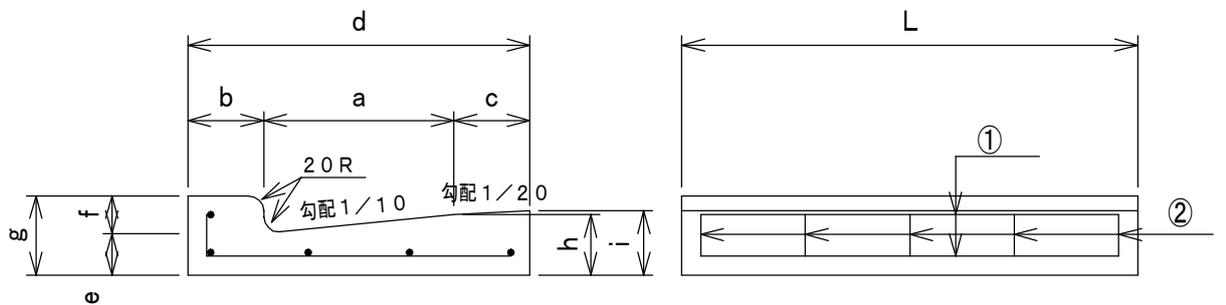

呼び名		寸法表 (mm)										鉄筋 (径一本数)		重量 (Kg)	
		a	b	c	d	e	f	f1	g	h	i	L	①		②
L 形 乗 入 れ 斜 ・ 平	250A 斜	250	100	-	350	55	50	100	155	80	-	600	φ4-4	φ4-5	42
	250A 平	250	100	-	350	55	50	-	105	80	-	600	φ4-4	φ4-5	39
	250B 斜H50	250	100	100	450	55	50	100	155	80	85	600	φ4-5	φ4-5	54
	250B 斜H20	250	100	100	450	55	20	100	155	80	85	600	φ4-5	φ4-5	51
	250B 平H50	250	100	100	450	55	50	-	105	80	85	600	φ4-5	φ4-5	51
	250B 平H20	250	100	100	450	55	20	-	75	80	85	600	φ4-5	φ4-5	49
	300 斜H50	300	100	100	500	55	50	100	155	85	90	600	φ4-5	φ4-6	62
	300 斜H20	300	100	100	500	55	20	100	155	85	90	600	φ4-5	φ4-6	59
	300 平H50	300	100	100	500	55	50	-	105	85	90	600	φ4-5	φ4-6	59
	300 平H20	300	100	100	500	55	20	-	75	85	90	600	φ4-5	φ4-6	54
	350 斜H50	350	100	100	550	55	50	100	155	90	95	600	φ4-5	D6-5	69
	350 平H50	350	100	100	550	55	50	-	105	90	95	600	φ4-5	D6-5	64
許容差 (mm以内)		-	±2	-	±2	-	±2	-	±3	-	±3	±3			

株式会社飯塚セメント工業所