

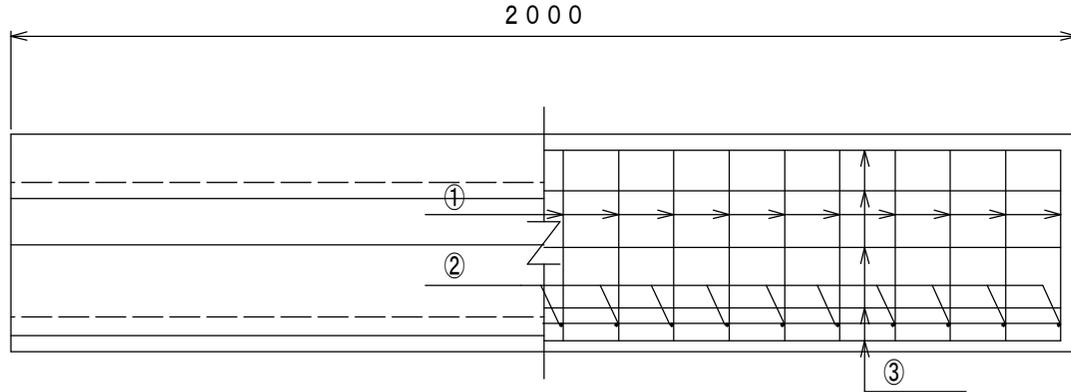


## 落ち蓋式U形側溝 [ドレーン3種]

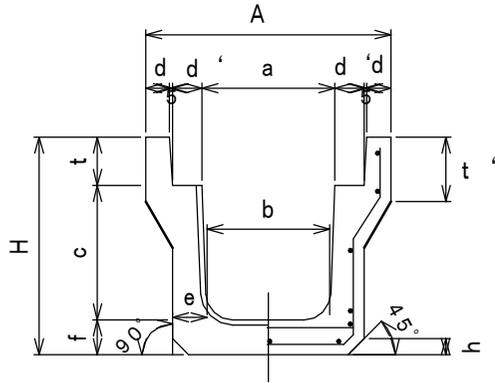

| 呼び名        | 寸法 (mm) |     |     |    |    |    |    |    |     |     |    | 配筋 (径-本数) |     |      | 重量 (Kg) |       |       |     |
|------------|---------|-----|-----|----|----|----|----|----|-----|-----|----|-----------|-----|------|---------|-------|-------|-----|
|            | a       | b   | c   | d  | d' | e  | f  | h  | t   | t'  | r  | A         | H   | L    |         | ①     | ②     | ③   |
| 250        | 250     | 230 | 250 | 45 | 55 | 65 | 65 | 30 | 90  | 120 | 50 | 460       | 405 | 2000 | φ5-20   | φ5-20 | φ4-13 | 333 |
| 300A       | 300     | 280 | 300 | 50 | 55 | 70 | 70 | 30 | 95  | 140 | 50 | 520       | 465 | 2000 | φ5-24   | φ5-24 | φ4-13 | 419 |
| 300B       | 300     | 270 | 400 | 50 | 55 | 70 | 70 | 40 | 95  | 140 | 50 | 520       | 565 | 2000 | D6-19   | D6-10 | φ4-15 | 472 |
| 300C       | 300     | 260 | 500 | 50 | 55 | 80 | 80 | 40 | 95  | 140 | 50 | 520       | 675 | 2000 | D6-21   | D6-11 | φ4-17 | 583 |
| 400A       | 400     | 370 | 400 | 55 | 55 | 70 | 70 | 40 | 110 | 140 | 50 | 630       | 580 | 2000 | D6-23   | D6-12 | φ4-17 | 505 |
| 400B       | 400     | 360 | 500 | 55 | 55 | 80 | 80 | 40 | 110 | 140 | 50 | 630       | 690 | 2000 | D6-23   | D6-12 | φ4-19 | 634 |
| 500A       | 500     | 460 | 500 | 60 | 60 | 80 | 80 | 40 | 125 | 155 | 50 | 750       | 705 | 2000 | D6-23   | D6-12 | φ4-20 | 685 |
| 500B       | 500     | 450 | 600 | 60 | 60 | 90 | 90 | 40 | 125 | 175 | 50 | 750       | 815 | 2000 | D6-25   | D6-13 | φ4-24 | 835 |
| 許容差 (mm以内) | ±3      | ±3  | ±3  | ±3 | ±3 | ±3 | ±3 | —  | ±3  | —   | —  | ±6        | ±6  | ±6   |         |       |       |     |