



鋼板巻ロングU SSグレーチングボルト固定型 (T-25) 250×250~500

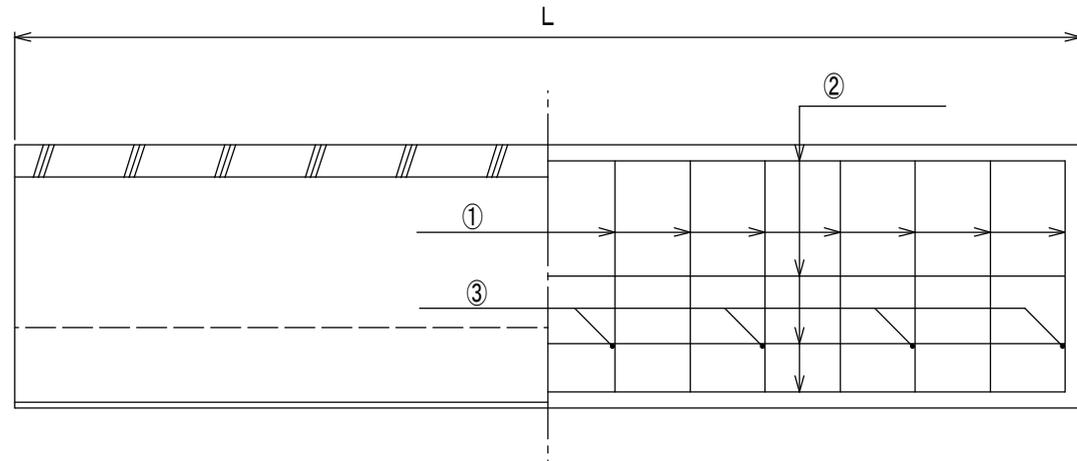

| 呼び名 | 寸法 (mm) | | | | | | | | | 配筋 (径*本数) | | | 重量 (Kg) | |
|------------|---------|-----|-----|----|----|----|-----|-----|-----|-----------|-------|-------|---------|------|
| | A | a1 | b | c | d | e | f | H | h1 | L | ① | ② | | ③ |
| 250×250 | 250 | 550 | 230 | 55 | 95 | 65 | 150 | 275 | 490 | 3000 | φ5-15 | φ5-9 | D10-9 | 1315 |
| 250×300 | 250 | 550 | 230 | 55 | 95 | 65 | 150 | 335 | 550 | 3000 | φ5-15 | φ5-9 | D10-9 | 1451 |
| 250×400 | 250 | 550 | 220 | 55 | 95 | 65 | 150 | 435 | 650 | 3000 | φ5-15 | φ5-11 | D10-9 | 1668 |
| 250×500 | 250 | 550 | 220 | 55 | 95 | 65 | 150 | 535 | 750 | 3000 | φ5-15 | φ5-11 | D10-9 | 1885 |
| 許容差 (mm以内) | ±3 | ±6 | ±3 | ±3 | ±3 | ±3 | ±3 | ±3 | ±6 | ±6 | | | | |

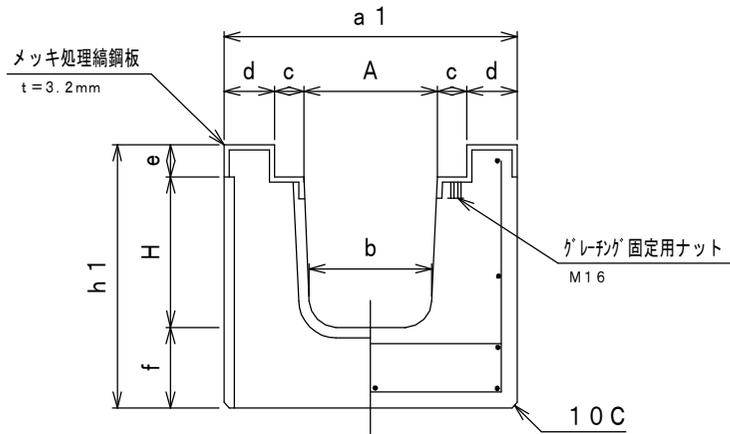